


BUILDING TRUST

WHAT TO LOOK OUT FOR

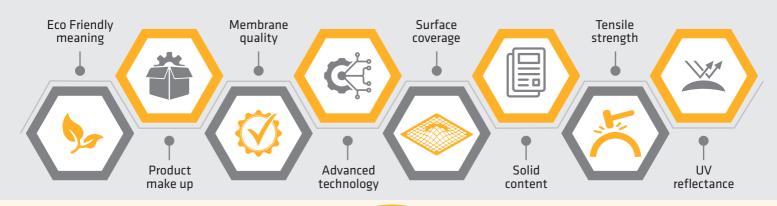

Sikalastic®-560 IN A CLASS OF ITS OWN

Polyurethane modified acrylic dispersion



The product cures to form a rubber-like elastomeric waterproof coating

ADVANTAGES:



- Overcoat failing torch-on and bitumen waterproofing systems
- Longer life expectancy especially if used in conjunction with the Sikalastic®-120 Fleece and Sika® Reemat Premium
- Superior cost/performance ratio
- Seamless waterproofing system
- Low VOC emitting water-based coating, non-toxic
- Over 100 years international experience in waterproofing products
- Increased strength and performance when used with Sika® Reemat Premium
- Excellent detailing work when used with Sika® Reemat Premium

CERTIFIED ENVIRONMENTAL INFORMATION:

- Conformity with LEED v2009 IEQc 4.2:
- Low-Emitting Materials Paints and Coatings

 Conformity with LEED v2009 SSc 7.2 (Option 1):
 Heat Island Effect Roof

APPROVALS / STANDARDS

- Liquid applied roof waterproofing kit according to ETAG 005, ETA-12/0308 issued by technical assessment body Instituto de ciencias de la construction Eduardo Torroja, Declaration of performance 99240033, provided with the CE marking
- Fulfils initial solar reflectance requirements acc. Energy Star (0.820)
- Meets requirements of external fire performance ENV 1187 BRoof (T1) on non-combustible substrates



ADVANCED TECHNOLOGY:

 A reflective coating to enhance energy efficiency by reducing cooling costs



TENSILE STRENGTH:

Not reinforced 1.5 N/mm²
Reinforced with Sikalastic® Fleece-120 12 N/mm²
Reinforced with Sikalastic® Reemat Premium 4-5 N/mm²



CRACK BRIDGING SYSTEM:

 Fantastic crack bridging capabilities when used in conjunction with Sika® Reemat Premium



SOLID CONTENT BY WEIGHT:

65% (+23°C / 50% r.h)

Looking for a far superior product to waterproof your roof with, then look no further than **Sikalastic®-560 system**.